


LightSYS+

System Architecture ANZ Ver1

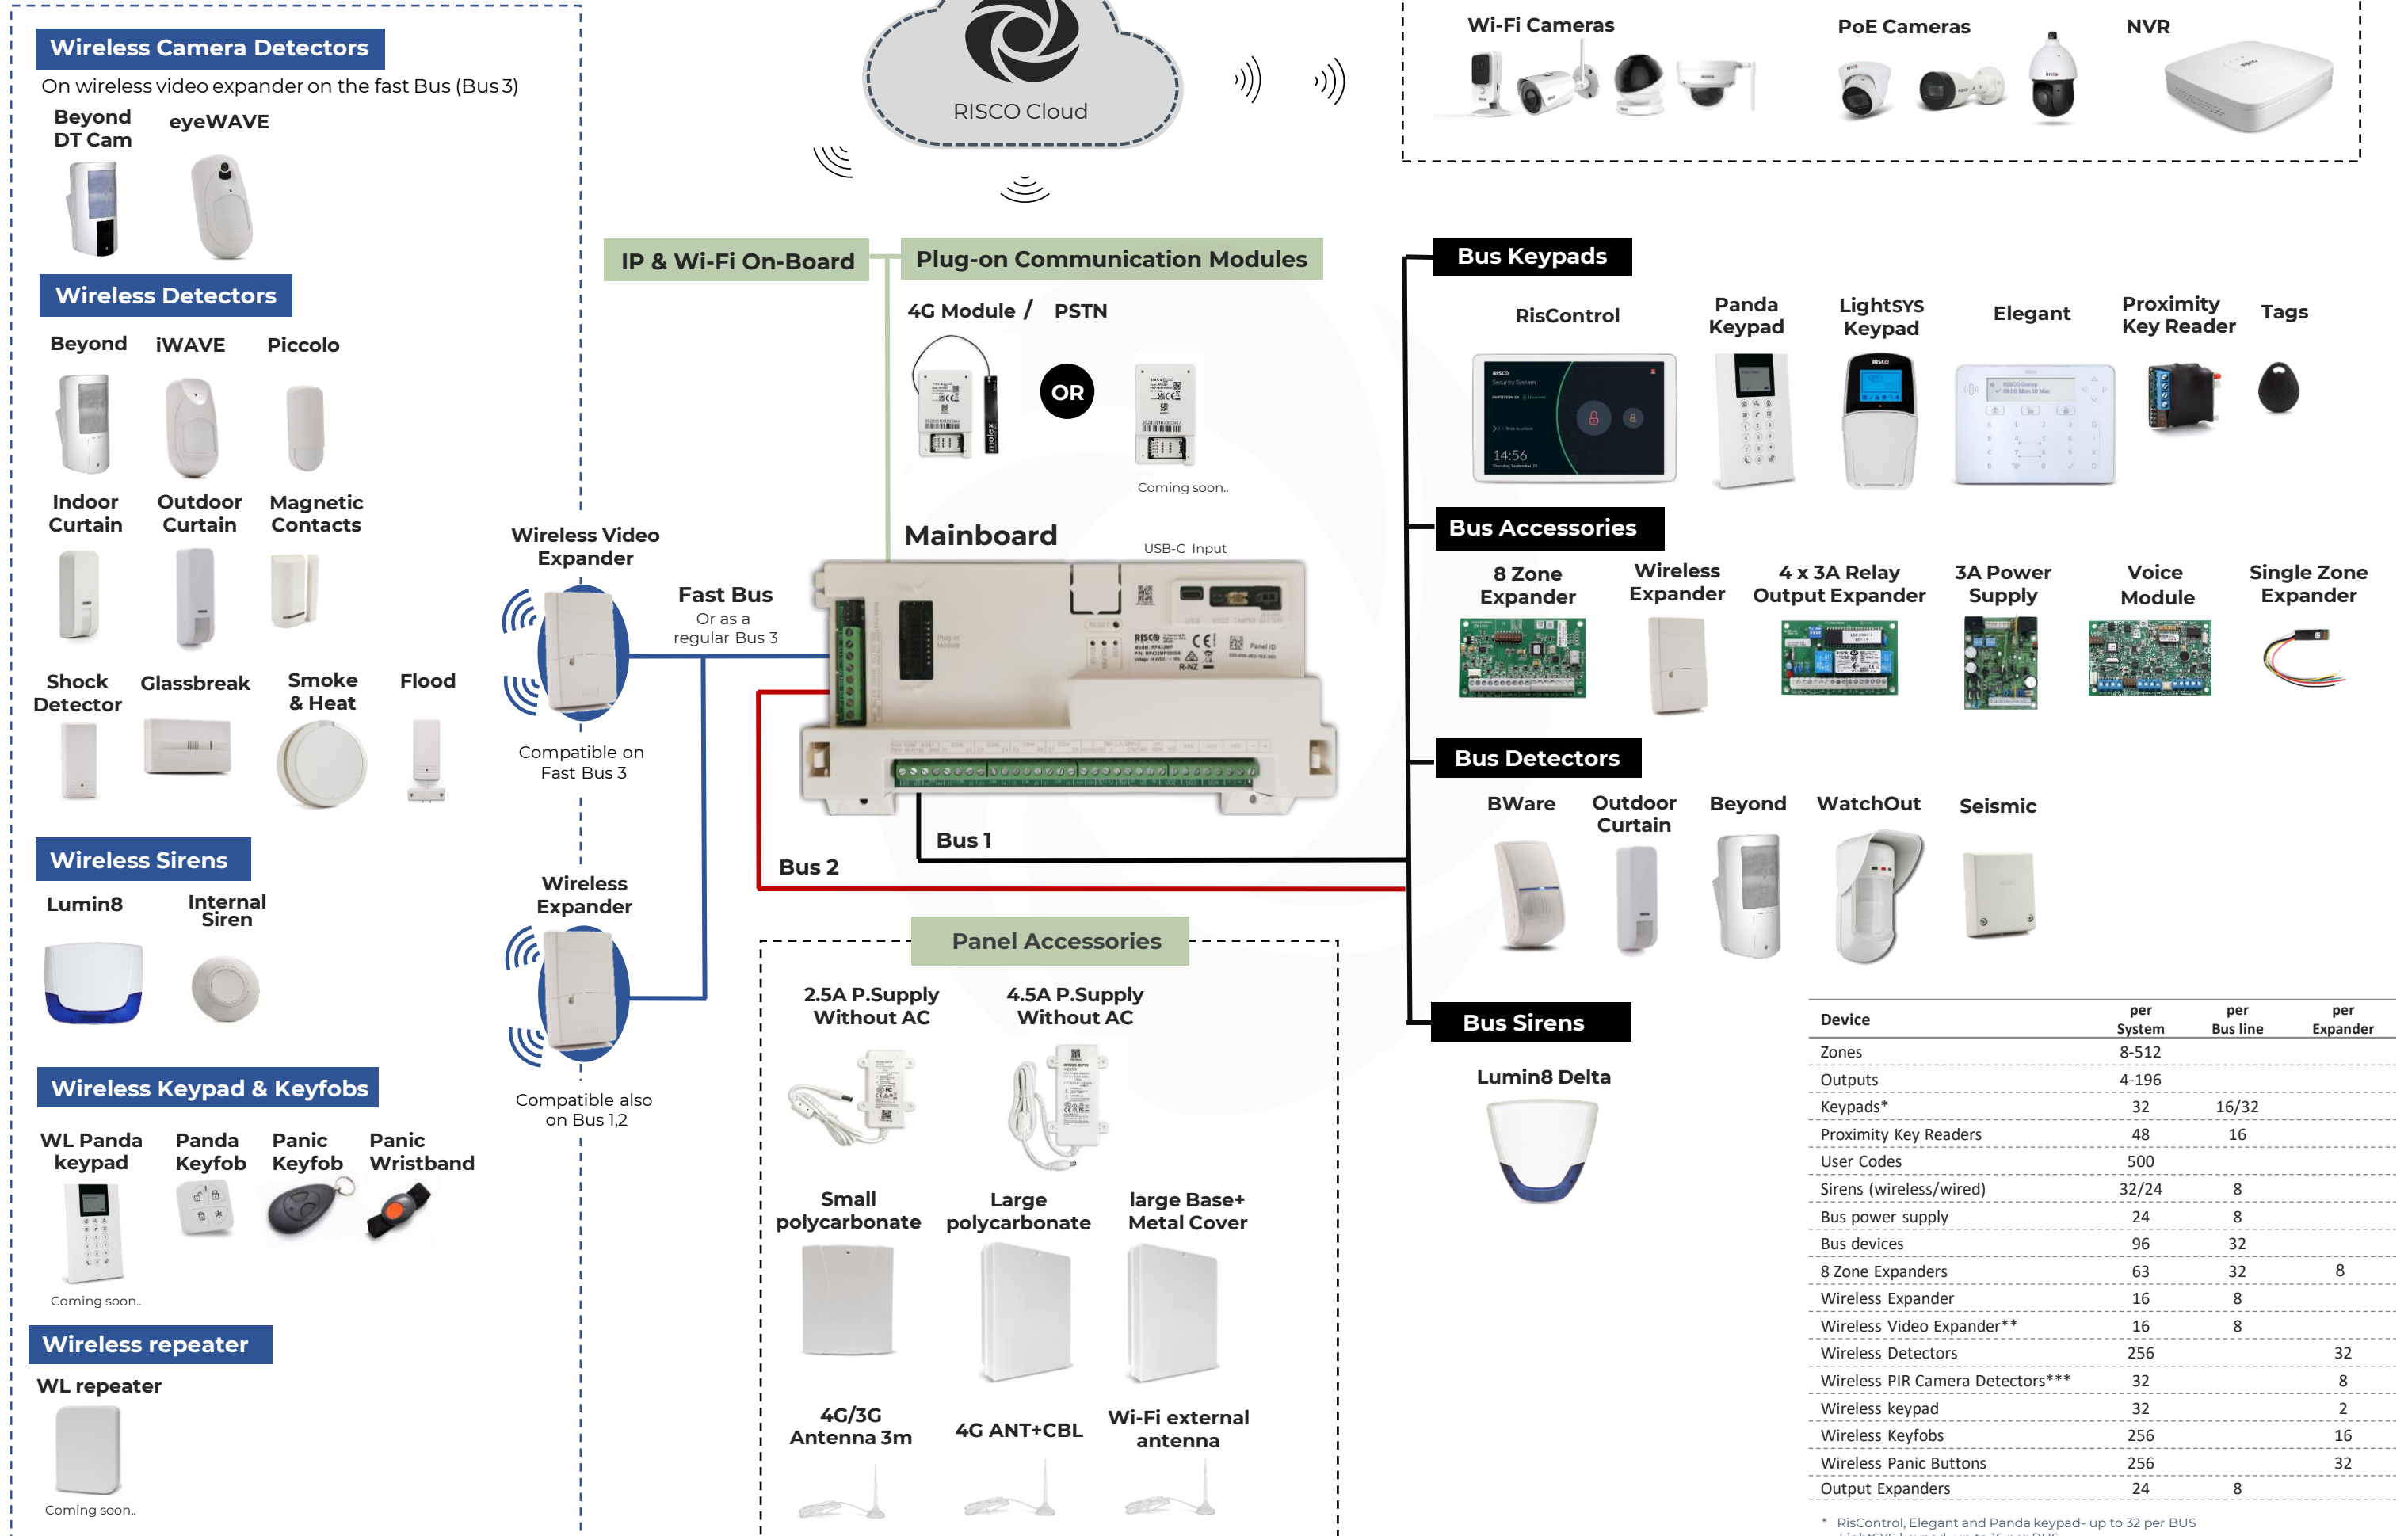

Device	per System	per Bus line	per Expander
Zones	8-512		
Outputs	4-196		
Keypads*	32	16/32	
Proximity Key Readers	48	16	
User Codes	500		
Sirens (wireless/wired)	32/24	8	
Bus power supply	24	8	
Bus devices	96	32	
8 Zone Expanders	63	32	8
Wireless Expander	16	8	
Wireless Video Expander**	16	8	
Wireless Detectors	256		32
Wireless PIR Camera Detectors***	32		8
Wireless keypad	32		2
Wireless Keyfobs	256		16
Wireless Panic Buttons	256		32
Output Expanders	24	8	

* RisControl, Elegant and Panda keypad- up to 32 per BUS
LightSYS keypad- up to 16 per BUS
** Supports as well for all other RISCO Wireless Devices
*** via Wireless Video Expander