

Suitable for cavity sliding and surface sliding doors



Easy to operate

Corrosion resistant





For use with aluminium or timber doors

& CaviLock®

§CL100 MorticeLock™

The **CL100 Mortice Lock** is a versatile mortice that has many different internal and external hardware options. The internal components have been built to resist corrosion, making it suitable for both internal and external use in commercial, architectural and residential applications.

The CL100 can be configured to work in hundreds of different ways!

The range of external hardware that can be fitted to this mortice is quite extensive. Please contact us for any special finishes or details that you may require for your handle hardware.

We also have a custom machine shop for one off or specialised runs.



♠ CL100 Lavilock fitted to CS NewYorker glazed aluminium door.






Technical Detail	Page
Suggested Selection Procedure	2
CL100 Mortice Case Construction	2
CL100 Mortice Case Dimensions	2
Handing / Spindle Options	3
Furniture Options	
Lever	3
Flush Turn	
DigiLock	4
LaviLock	5
Louise	6
Flush pulls	6
Euro Cylinders	11
Lock configuration options	7-11
Glossary	12

Suggested Selection Procedure

Satin Chrome (SCP)
Polished Brass (PB)
eg. SCP

Check functionality7-11 eg. Latching with key locking

Dimensions

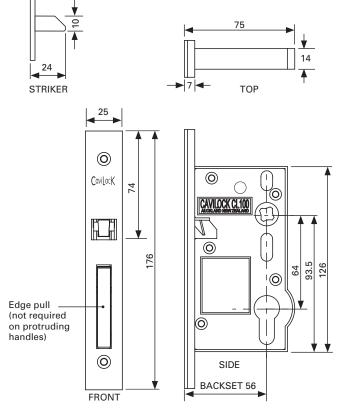

Construction

Case: Diecast Zinc

Faceplate & striker: Brushed Stainless Steel or Brass

(depending on finish required)


Internal parts: Bronze/Brass

Screws, springs etc: Stainless Steel/Steel

NOTE:

Not suitable for use in highly corrosive environments such as near the coast or swimming pools etc.

Spindles

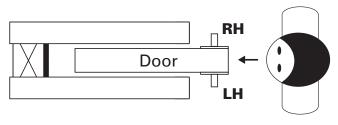

When standing looking into the cavity pocket, if the locking snib is on your *left hand* side it is a Left

Handing

When standing looking into the cavity pocket, if the locking snib is on your right hand side it is a Right Hand lock.

The CL100 is manufactured to accept square spindles (single or split) of 7.62mm (0.3"). The drive socket can be one of the following:

- **SQUARE**: Most suited to flush type furniture which do not have their own return springs
- **STAR**: Most suited to lever type furniture with return springs.
- SPLIT: Square/Square
- **SPLIT**: Star/Square
- SPLIT: Star/Star

Furniture Options


€CL100 Lever[™]

This is the most common commercial side handle fitted to the CL100 Mortice Lock. It is robust, strong and has a commercial look that matches other handles and locks in most applications.

The vertical lever grip enables a positive pull action on even the heaviest doors.

Dimensions

Other lever and rose hardware may be fitted to the side of the CL100 Mortice Lock. Please contact CaviLock for information on which handles are applicable.




Symbol used in lock configuration options:

★ CL100 Lever with Key Locking.



CL100 Lever with Turn.

40 120 55

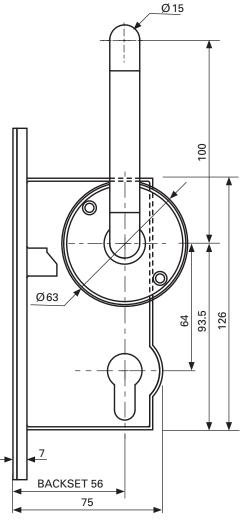


© Cavity Sliders Limited. Drawings are not to scale. All dimensions are in mm.

CL100 Furniture

CL100 Furniture

€CL100 FlushTurn™

The **CL100 FlushTurn** is a high quality brass component that matches other circular hardware currently available for hinged doors, but is specifically designed for sliding doors.



Symbol used in lock configuration options

The shallow fitting depth and positive feel to the turn make this a popular side handle for both latching and non latching applications. When combined with the CL100 Mortice Lock and euro profile cylinder it makes for a great looking medium security option.

Requires minimum door thickness of 37mm.








♠ CL100 Flush Turn with key.

Dimensions

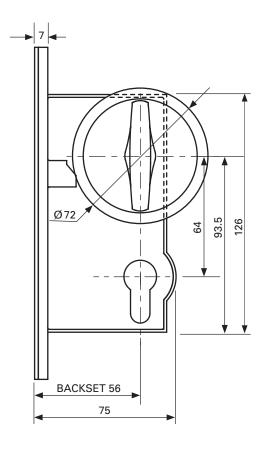


© Cavity Sliders Limited. Drawings are not to scale. All dimensions are in mm.

§CL100 DigiLock™

By taking our standard **CL100 Mortice** and adding the functionality of a **Digital Lock**, we can offer customers high security that is upgradeable (by changing pin numbers) and dependable.

This lock can be set to "slam lock" which means every time the door is closed it is locked and requires pin



Symbol used in lock configuration options


code access to open. There is an added function of dual security - this lock can be supplied with pin code + key access, meaning you need both access passes to get in.



★ CL100 DigiLock with key locking.




★ CL100 DigiLock front and back face.

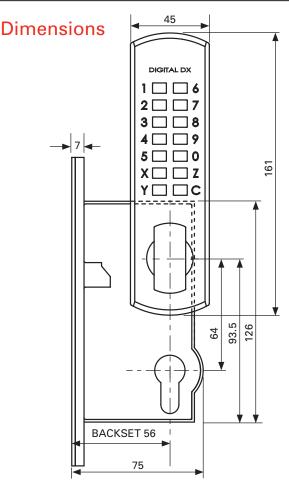

© Cavity Sliders Limited. Drawings are not to scale. All dimensions are in mm.

€CL100 LaviLock™

The CL100 LaviLock is a lockset designed for use in hospitals, aged care facilities, public bathrooms, disabled bathrooms or educational facilities. The brass and stainless steel components ensure ease of use and durability for years to come. The LaviLock has a reputation for resistance to harsh environments and resisting harsh treatment in public areas.*



Symbol used in lock configuration options:

Easily visible "Vacant / In Use" lettering and fail safe exit free functionality also ensure that the LaviLock keeps its reputation.

The LaviLock is supplied as a complete set including:



- Lever Handles (standard or offset for disabled access available)
- Stainless Steel Indication Plates
- Slide Locking Buttons including Emergency Release
- CL100 Mortice Lock Case

IMPORTANT: Contact CS customer service staff for further information regarding product compliance with Australian standards relating to disabled access.



♠ 'Vacant/In Use' indicator plate on outside door face with Emergency Release.



♠ Easy to use 'Unlock/Lock' lever on inside door face. Offset handle shown.



♠ CL100 Lavilock with standard lever handle fitted to CS NewYorker door.



♠ Also available with a circular flush turn on the outside (for surface sliding doors).

*If LaviLock is to be installed into areas where there is exposure to corrosive environments, e.g. high chlorine or salt concentration, contact CS for an appropriate solution.


Dimensions

© Cavity Sliders Limited. Drawings are not to scale. All dimensions are in mm.


75

IMPORTANT: To be Council compliant, the Lever/Lever option must be used and the door needs to be a minimum of 1050mm to allow minimum clear walk through of 850mm.

Handing



When standing looking into the cavity pocket, if the locking snib is on your *left hand* side then the **LaviLock** is a Left Hand lock.



When standing looking into the cavity pocket, if the locking snib is on your *right hand* side then the **LaviLock** is a Right Hand lock.

EF = Exit Free: the handle on the **inside** remains unlocked even when in locked position.

EXIT FREE FUNCTION:

To unlock the door, simply pull on the lever handle to unlock and unlatch the LaviLock in one smooth action.

CL100 Furniture

€CL100 Louise™

The Louise range of door hardware is specifically designed to work with the CL100 Mortice Lock. It can be factory fitted to our

It can be factory fitted to our CS NewYorker glazed doors or CS AluTec aluminium doors.

The 190mm long face plates of

the Louise can be the same on each side of the door or different, depending on the configuration required.

The Louise can be set up as latching only, security with key access or for privacy (such as a bathroom) there are many options available.

Requires minimum door thickness of 37mm.

Finishes available: SCP or PB.



★ Satin chrome key locking Louise on CS NewYorker door.



Front Edge Pull


Slide locking

button

Symbol used in lock configuration options

◆ Satin chrome Louise with slide locking on CS AluTec door.


Dimensions

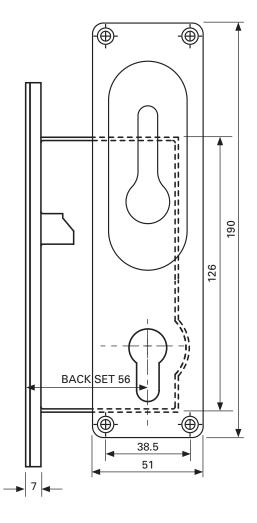

© Cavity Sliders Limited. Drawings are not to scale. All dimensions are in mm.

Each Louise plate has a recessed side pull with a lever if required to release the latch. The bottom half has one of the following:

- A Plain finished plate
- B Slide locking button
- C Emergency release
- **D** Euro Cylinder



Edge Pulls

All **CL100** lock cases come with the option of a built-in flush **Front Edge Pull** in either Stainless Steel or Brass. This edge pull is designed for use on doors which slide completely inside a cavity wall.






I1000 Louise Range (Face Plate Only Codes)





 SCP
 CL100 I
 +
 1000
 1001
 1002
 1003
 1004
 1005


 PB
 CL100 I
 +
 2000
 2001
 2002
 2003
 2004
 2005

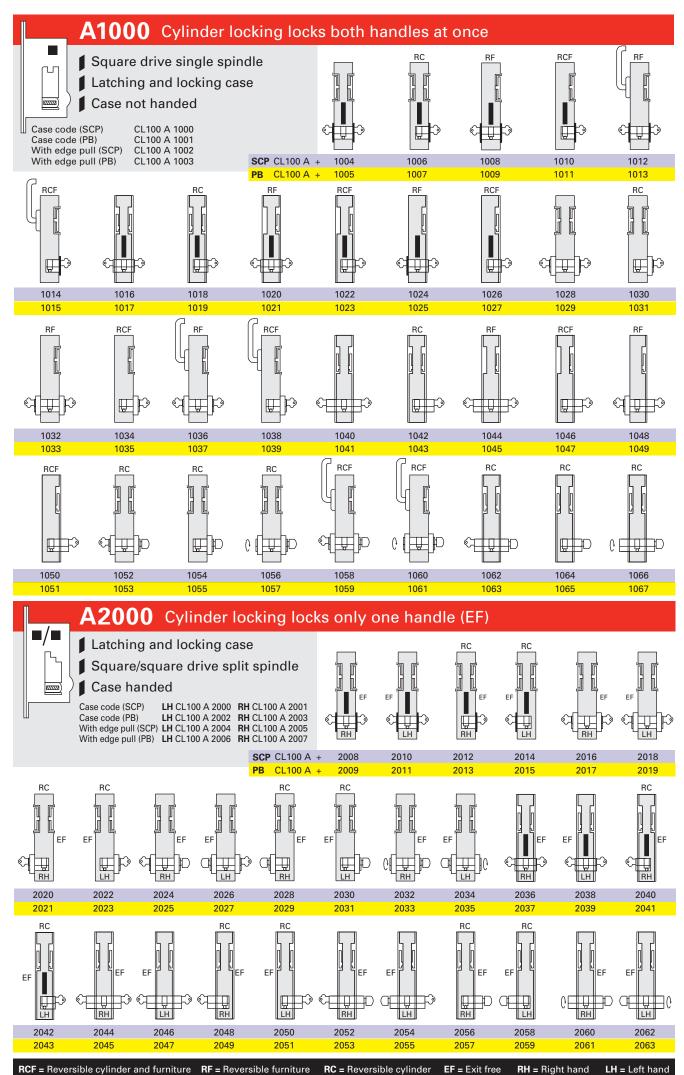



7

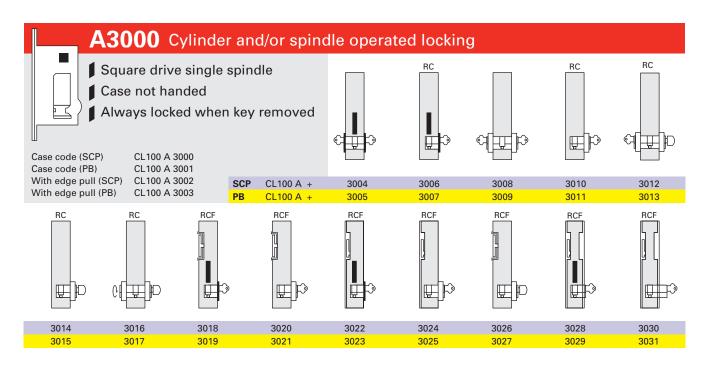


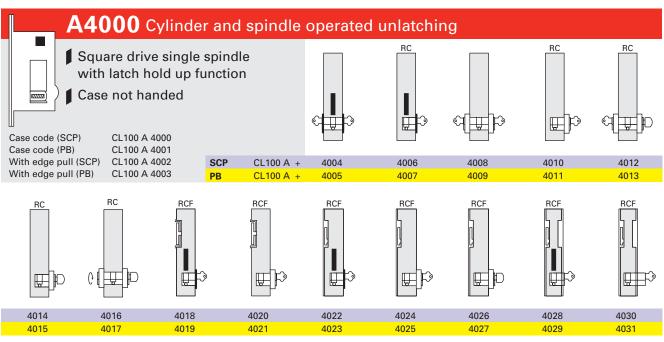


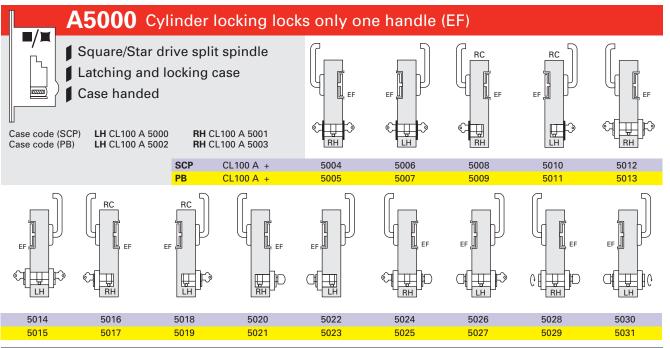


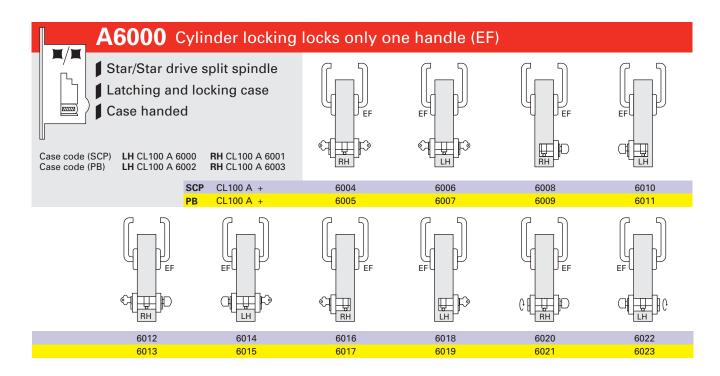

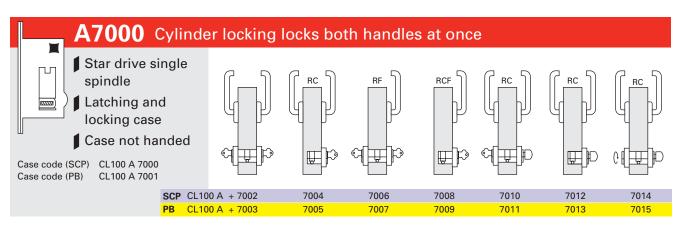


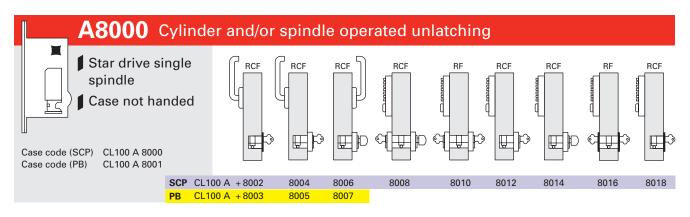

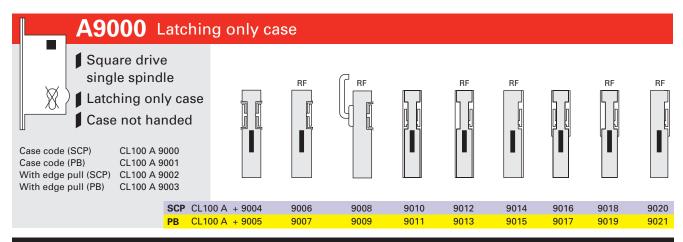

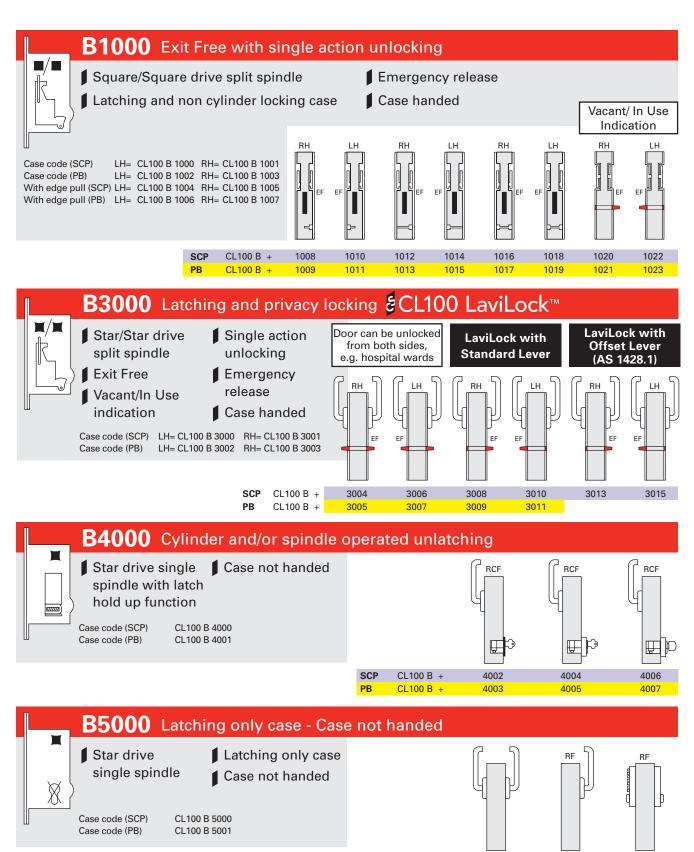



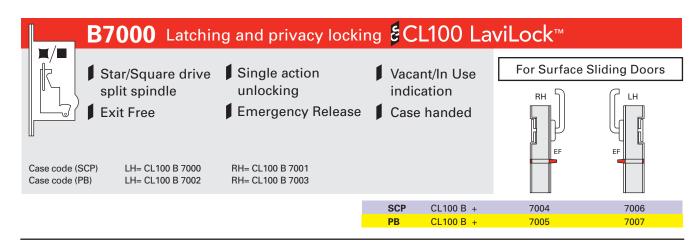


EuroCylinder

The CaviLock CL100 will accept 'Standard' and 'Security' Europrofile type cylinders. The combinations in stock cover 3, 5 and 6 pin options with Key/Key, Key/Turn and Turn/Emergency as well as single cylinder options with Key Only or Turn Only. The 3 pin cylinders are ideal for flush handle situations because of their 42mm finished width.

All cylinders are constructed from extruded brass with stainless steel springs and in the 5 and 6 pin options, come as standard with grub screws at the base of the cylinder enabling easy re-pinning.


Available in true Satin Chrome finish, Brass and Oil Rubbed Bronze (3 pin only).

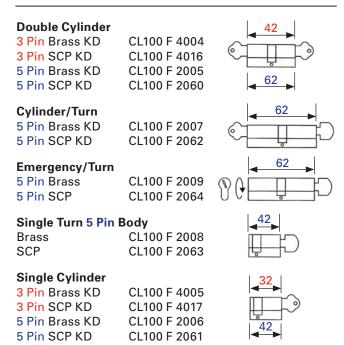

Note: The 3 and 5 pin cylinders are standard to the CL100 configurations in keyed to differ (KD). If 6 pin cylinders or keyed alike cylinders (KA) are required, please specify at time of ordering.

Dimensions




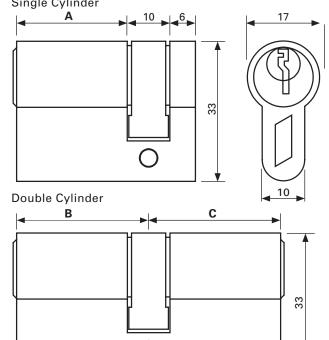


© Cavity Sliders Limited. Drawings are not to scale. All dimensions are in mm.

Cylinder Dimensions			
Single	(A + 16)	Double	$(\mathbf{B} + \mathbf{C})$
3 pin	16 + 16 = 32	3 pin	21 + 21 = 42
5 pin	26 + 16 = 42	5 pin	31 + 31 = 62
6 pin	35 + 16 = 51	6 pin	35 + 35 = 70


Escutcheons








options







used in lock configuration options

Glossary of Terms

Cylinder Locking

The CL100 accepts standard and security euro profile type cylinders in 3, 5 and 6 pin configurations.

Emergency Release

In case of emergency, door can be unlocked with the edge of a coin or similar.

Escutcheon

A shield fixed to a surface of a door, primarily to protect the door from wear or damage from continued insertion of the key.

Exit Free (EF)

Even when in the locked position, the handle on the *inside* remains unlocked.

Edge Pull

Front edge pull to retrieve doors which slide completely inside a cavity pocket.

Flush Turn

Furniture for use on doors which slide completely inside a cavity pocket.

Latching

Door is held closed, but not locked.

Locking

Closed door is made secure with a key.

Spindle

The main rotating part of the lock case. The CL100 accepts square spindles, either single or split of size 7.62mm (0.3"). The latch's drive socket can be either Square, Star, or a split combination of both.

Striker (striking plate)

Plate fixed to the door jamb which the bolt or bolts of a lock or latch engages into.

Turn

Allows a door to be locked with a key from one side and a simple turn from the other. Key and turn cylinders are useful when controlled access is required from one side and easy access from the other.

GROUP The Cavity Slider Experts

© All copyright and other property in this document is reserved by Cavity Sliders Limited. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions.

® CS FOR DOORS and CAVILOCK are Registered Trademarks.

CAVILOCK® CL100 (O.D. 1994). 60114 - 04.2020

Contact Us

FOR DOORS NEW ZEALAND

Auckland Head Office

5 - 7 Rakino Way, Mt Wellington, Auckland

1 +64 9 276 0800

+64 9 276 2525

☑ info@csfordoors.co.nz

BOP/Waikato

40 Newton Street, Mt Maunganui

1 +64 7 928 0800

+64 7 928 2525

Christchurch

6 Marylands Place, Middleton, Christchurch

1 +64 3 348 6158

+64 3 348 6150

www.csfordoors.co.nz

CavitySliders AUSTRALIA

NSW Head Office

Unit 1, 7-11 Rodborough Rd, Allambie Heights, NSW 2100

1 +61 2 9905 0588

+61 2 9905 7088

☑ info@cavitysliders.com.au

Nationwide

1300 975 433

www.cavitysliders.com.au





CA Head Office

548 Finney Ct, Gardena, 90248 CA

(888) 466 0030

(310) 769 5824

☑ info@cavitysliders.com

www.cavitysliders.com