Tactical Power Products- Australia's Security Power Specialist

High Quality Security Products Designed, Manufactured and Supported in Australia

www.tacpower.com.au

PO Box 90 Kurrajong NSW 2758 Australia Tel +61 1300822769 sales@tacpower.com.au





Mounting Instructions

The TP Small-Kit is supplied with the following hardware to mount tamper switches and TPS power module.

The TPS power module is mounted with 4 x M4 Pan Phillips screws and external tooth shake proof washers, Tamper switches with 4 x #4x5/8 self cutting Phillips screws, Strain relief 1 x black cable clamp for mains lead and Red / black 350mm battery leads

Mounting the TPS power module

One M4 shakeproof washers MUST be located under each M4 x 6mm screws and are tightented down to ensure a proper earth bond is made between the TPS power module and the battery enclousure.

Final Checks

Test the earth bond with a multimeter between the earth pins of the mains lead connected to the TPS power module and the M4 x 6mm mounted screws. Zero ohms should be read on the meter. If not retighten screws


Mounting the tamper switches

Mount tamper switches before mounting wall mounting the cabinet.

Each tamper switches is mounted with $2 \times \#4 \times 5/8$ screws Tamper switch 1 top switch is fitted with a small hump. Tamper switch 2 bottom switch is fitted with longer bar. Dependant on the mounting surface a small kink may be required to be made in the switch bar to ensure correct operation of the switch when mounted against a wall.

Strain Relief

Install the black cable clamp on the base of the enclosure where the mains leads exits and clamp down the pliers or clamp tool and insert the cable clamp into the mounting hole.

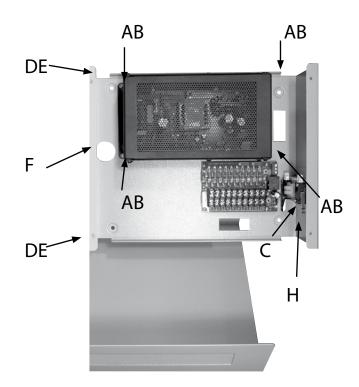

	Contents
Α	4 x M4 x 6mm Pan Phillips screws
В	4 x M4 shakeproof external washers
C	4 x #4 x 5/8 Cutting screws-Tampers
D	4 x M3 x 10mm washer head Pan Phillips Screws
E	4 x M3 shakeproof external washers
F	Black mains cable strain relief clamp
G	Red / Black 350mm battery leads
Н	2 x Microswitches
*	PDM & Power Module Not supplied

Dimensions: 250Wx310Hx100Dmm Materail: 1.1mm Steel,zinc plated Colour APO Grey







TPS12-10DC

12VDC 10A Power Supply & 13.8VDC 1.4A Battery Charger

TPS13-5DC

13.5VDC 5 A Power Supply & 13.8VDC 1.4A Battery Charger



TIM-01

Universal Digital Timer



© 2016 The contents of this manual are copyright and may not be reproduced without permisssion of - Tactical Power Products Pty Limited.



PDM8

8 Way Power Distribution with EOL Fire Trip

