



ACSS INTERCOMS

PRODUCT CATALOGUE

ACSS
COMPLETE ACCESS

ACSS INTERCOMS

Have peace of mind from being able to see, hear & speak to your visitors before opening the door with ACSS's innovative and sleek range of internal video door monitors and external call stations.

With a host of great user friendly functions, the ACSS Video phone range will provide your house, office or

apartment building with extra security, as well as an intuitive intercom system.

High quality day/night cameras inbuilt into the robust external call stations and the ability to connect to CCTV cameras means you will never have to wonder who is at your front door again.



7" ECO MONITOR

FULL COLOUR LCD SCREEN



Finishes

- AIEMWH
WHITE
- AIEMBK
BLACK

Functions




Features

- Lock control for doors
- Doorbell camera
- Monitor doorbell camera or CCTV
- Transfers to other monitors
- Calls between monitors
- Broadcast to other monitors

Specifications

LCD	7" digital LCD
Resolution	800 x 480
Wire connection	4 wires (video, power, ground, audio)
Frequency response	400-3.5K
Intercom distance	60 m (RVV4x0.5) 100 m (RVV3*0.5+SYV75-3)
Keys	7 buttons
Outdoor cameras	2
Support CCTV	2
Extension monitors	Up to 3
Ring tone	12 chord
Working voltage	DC15V, 1A max/DC36V, 0.4A max
Working temperature	0°C to 50°C
Dimensions	185 x 127 x 17 mm

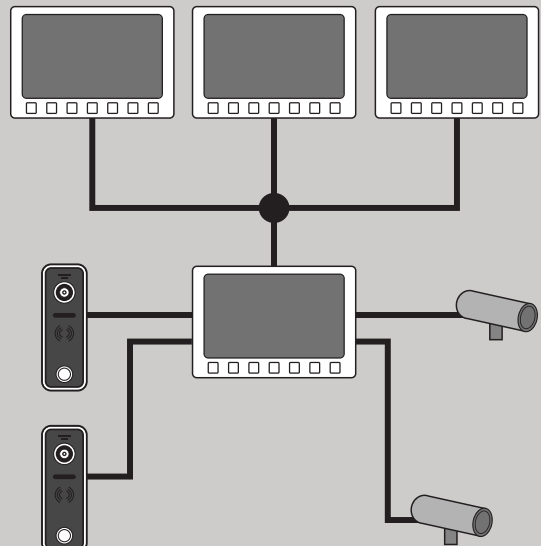

7" TOUCH SCREEN MONITOR


FULL COLOUR LCD TOUCH SCREEN



Finishes

- AITSMWH
WHITE
- AITSMBK
BLACK

Functions

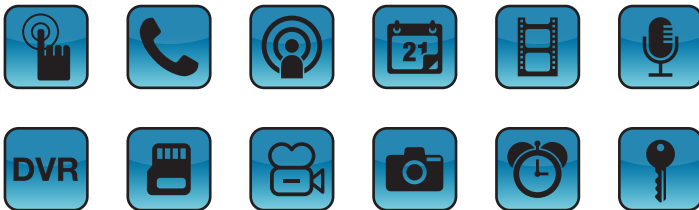


Features

- DVR function
- Answering machine
- Doorbell camera
- Video and audio recording
- Multimedia manager
- Calendar
- Alarm clock
- Lock control for doors
- Monitor doorbell or CCTV
- Transfers to other monitors
- Calls between monitors
- Broadcast to other monitors
- Listening between monitors
- SD card storage

Specifications

LCD	7" thin LCD (touchscreen)
Resolution	800 x 480
Wire connection	4 wires (video, power, ground, audio)
Frequency response	400-3.5K
Intercom distance	60 m (RVV4x0.5) 100 m (RVV3*0.5+SYV75-3)
Keys	Touch keys (1 or 7)
Outdoor cameras	2
Support CCTV	2
Extension monitors	Up to 3
Ring tone	8 chord (customizable)
Working voltage	DC15V, 1A max/DC36V, 0.4A max
Working temperature	0°C to 50°C
Dimensions	185 x 127 x 17 mm

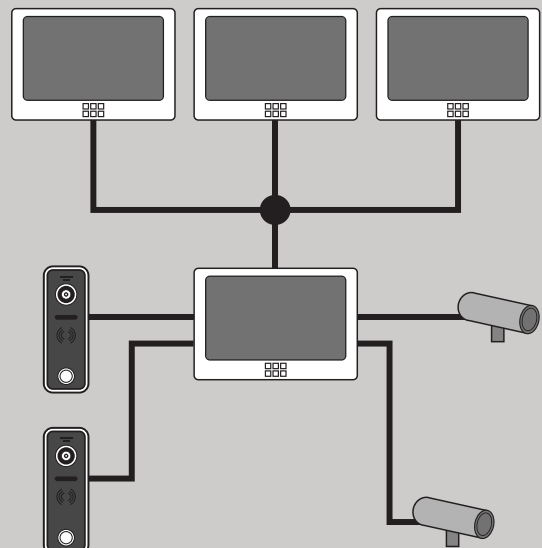

EXTERNAL CALL STATION

ANTI VANDAL




Finishes


 **AIAVDS**
HAMMERED
METAL


STANDARD CALL STATION



Finishes

 **AIDSWH**
WHITE

 **AIDSBK**
BLACK

 **AIDSSS**
STAINLESS
STEEL

Functions



Features

- Anti-oxidation, durable aluminum outdoor unit
- Pinhole camera
- Night vision
- Water resistant
- Lock control
- Easy DIY installation

Functions



Features

- Anti-oxidation, durable aluminum outdoor unit
- Night vision
- Water resistant
- Lock control
- Easy DIY installation

Specifications

Subscribers	1
Camera image sensor	1/4" colour CMOS
TV lines	700
Installation method	Surface/flush mounted/corner
Operating temperature	-30°C to 60°C
Connection	4 wires
Lock control	Yes
Power	11 - 13V
Dimensions	160 x 70 x 20 mm

Specifications

Subscribers	1
Camera image sensor	1/4" colour CMOS
Viewing angle	110°
TV lines	800
Installation method	Surface/corner
Operating temperature	-30°C to 60°C
Connection	4 wires
Lock control	Yes
Power	11 - 13V
Dimensions	133.2 x 48 x 15.5 mm

ACSS

COMPLETE ACCESS

Disclaimer: Whilst every effort has been made to ensure accuracy in the representation of these products, neither ACSS nor its employees, shall be liable under any circumstances to any party in respect of decisions or actions they may make as a result of using this information.

www.lsc.com.au

DISTRIBUTED BY:



○ MELBOURNE (H/O)

140-158 Dryburgh
St North Melbourne,
VIC 3051, PO Box
261, North
Melbourne 3015

p 03 9329 7222
f 03 9329 2570

○ SYDNEY

44 Skarratt St
Silverwater, NSW
2128, PO Box 6545,
Silverwater Business
Centre 1811

p 02 9647 8111
f 02 9647 8100

○ BRISBANE

15-17 Jeays St
Bowen Hills, QLD
4006, PO Box 2419,
Fortitude Valley 4006

p 07 3252 1056
f 07 3252 1087

○ ADELAIDE

333 Halifax St
Adelaide, S.A. 5000,
PO Box 7032, Hutt
Street Adelaide 5000

p 08 8223 2999
f 08 8223 1777

○ PERTH

244 Lord St
Perth, WA, 6000,
PO Box 8683, Perth
Mail Centre Perth
6849

p 08 9328 7488
f 08 9227 7363

○ NEW ZEALAND

32a Poland Road
Glenfield, Auckland,
New Zealand 1310

p +64 9 444 5117
f +64 9 444 5119

7" ECO MONITOR

FULL COLOUR LCD SCREEN



\$

Finishes

- AIEMWH WHITE
- AIEMBK BLACK

Functions




Features

- Lock control for doors
- Doorbell camera
- Monitor doorbell camera or CCTV
- Transfers to other monitors
- Calls between monitors
- Broadcast to other monitors

Specifications

LCD	7" digital LCD
Resolution	800 x 480
Wire connection	4 wires (video, power, ground, audio)
Frequency response	400-3.5K
Intercom distance	60 m (RVV4x0.5) 100 m (RVV3*0.5+SYV75-3)
Keys	7 buttons
Outdoor cameras	2
Support CCTV	2
Extension monitors	Up to 3
Ring tone	12 chord
Working voltage	DC15V, 1A max/DC36V, 0.4A max
Working temperature	0°C to 50°C
Dimensions	185 x 127 x 17 mm

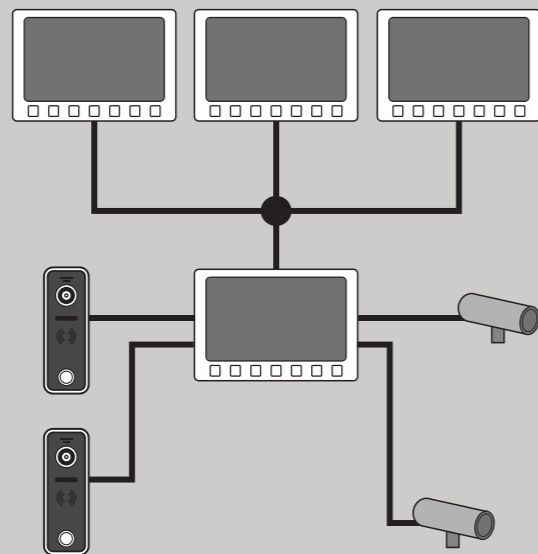

7" TOUCH SCREEN MONITOR

FULL COLOUR LCD TOUCH SCREEN



\$

Finishes

- AITSMWH WHITE
- AITSMBK BLACK

Functions




Features

- DVR function
- Answering machine
- Doorbell camera
- Video and audio recording
- Multimedia manager
- Calendar
- Alarm clock
- Lock control for doors
- Monitor doorbell or CCTV
- Transfers to other monitors
- Calls between monitors
- Broadcast to other monitors
- Listening between monitors
- SD card storage

Specifications

LCD	7" thin LCD (touchscreen)
Resolution	800 x 480
Wire connection	4 wires (video, power, ground, audio)
Frequency response	400-3.5K
Intercom distance	60 m (RVV4x0.5) 100 m (RVV3*0.5+SYV75-3)
Keys	Touch keys (1 or 7)
Outdoor cameras	2
Support CCTV	2
Extension monitors	Up to 3
Ring tone	8 chord (customizable)
Working voltage	DC15V, 1A max/DC36V, 0.4A max
Working temperature	0°C to 50°C
Dimensions	185 x 127 x 17 mm

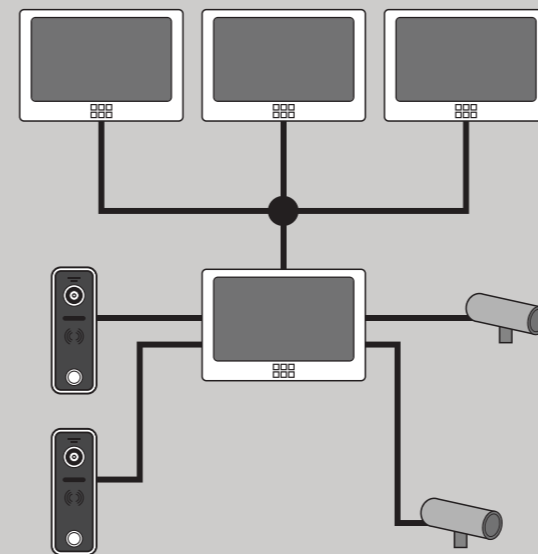

EXTERNAL CALL STATION

ANTI VANDAL STANDARD CALL STATION



\$

Finishes

- AIAVDS HAMMERED METAL

Functions



Features

- Anti-oxidation, durable aluminum outdoor unit
- Pinhole camera
- Night vision
- Water resistant
- Lock control
- Easy DIY installation

Specifications

Subscribers	1
Camera image sensor	1/4" colour CMOS
TV lines	700
Installation method	Surface/flush mounted/corner
Operating temperature	-30°C to 60°C
Connection	4 wires
Lock control	Yes
Power	11 - 13V
Dimensions	160 x 70 x 20 mm



\$

Finishes

- AIDSWH WHITE
- AIDSBK BLACK
- AIDSSS STAINLESS STEEL

Functions



Features

- Anti-oxidation, durable aluminum outdoor unit
- Night vision
- Water resistant
- Lock control
- Easy DIY installation

Specifications

Subscribers	1
Camera image sensor	1/4" colour CMOS
Viewing angle	110°
TV lines	800
Installation method	Surface/corner
Operating temperature	-30°C to 60°C
Connection	4 wires
Lock control	Yes
Power	11 - 13V
Dimensions	133.2 x 48 x 15.5 mm

ACSS INTERCOMS

Have peace of mind from being able to see, hear & speak to your visitors before opening the door with ACSS's innovative and sleek range of internal video door monitors and external call stations.

With a host of great user friendly functions, the ACSS Video phone range will provide your house, office or

apartment building with extra security, as well as an intuitive intercom system.

High quality day/night cameras inbuilt into the robust external call stations and the ability to connect to CCTV cameras means you will never have to wonder who is at your front door again.



Disclaimer: Whilst every effort has been made to ensure accuracy in the representation of these products, neither ACSS nor its employees, shall be liable under any circumstances to any party in respect of decisions or actions they may make as a result of using this information.

www.lsc.com.au



DISTRIBUTED BY:



MELBOURNE (H/O)

140-158 Dryburgh
St North Melbourne,
VIC 3051, PO Box
261, North
Melbourne 3015

p 03 9329 7222
f 03 9329 2570

SYDNEY

44 Skarratt St
Silverwater, NSW
2128, PO Box 6545,
Silverwater Business
Centre 1811

p 02 9647 8111
f 02 9647 8100

BRISBANE

15-17 Jeays St
Bowen Hills, QLD
4006, PO Box 2419,
Fortitude Valley 4006

p 07 3252 1056
f 07 3252 1087

ADELAIDE

333 Halifax St
Adelaide, S.A. 5000,
PO Box 7032, Hutt
Street Adelaide 5000

p 08 8223 2999
f 08 8223 1777

PERTH

244 Lord St
Perth, WA, 6000,
PO Box 8683, Perth
Mail Centre Perth
6849

p 08 9328 7488
f 08 9227 7363

NEW ZEALAND

32a Poland Road
Glenfield, Auckland,
New Zealand 1310

p +64 9 444 5117
f +64 9 444 5119

ACSS INTERCOMS PRODUCT CATALOGUE

